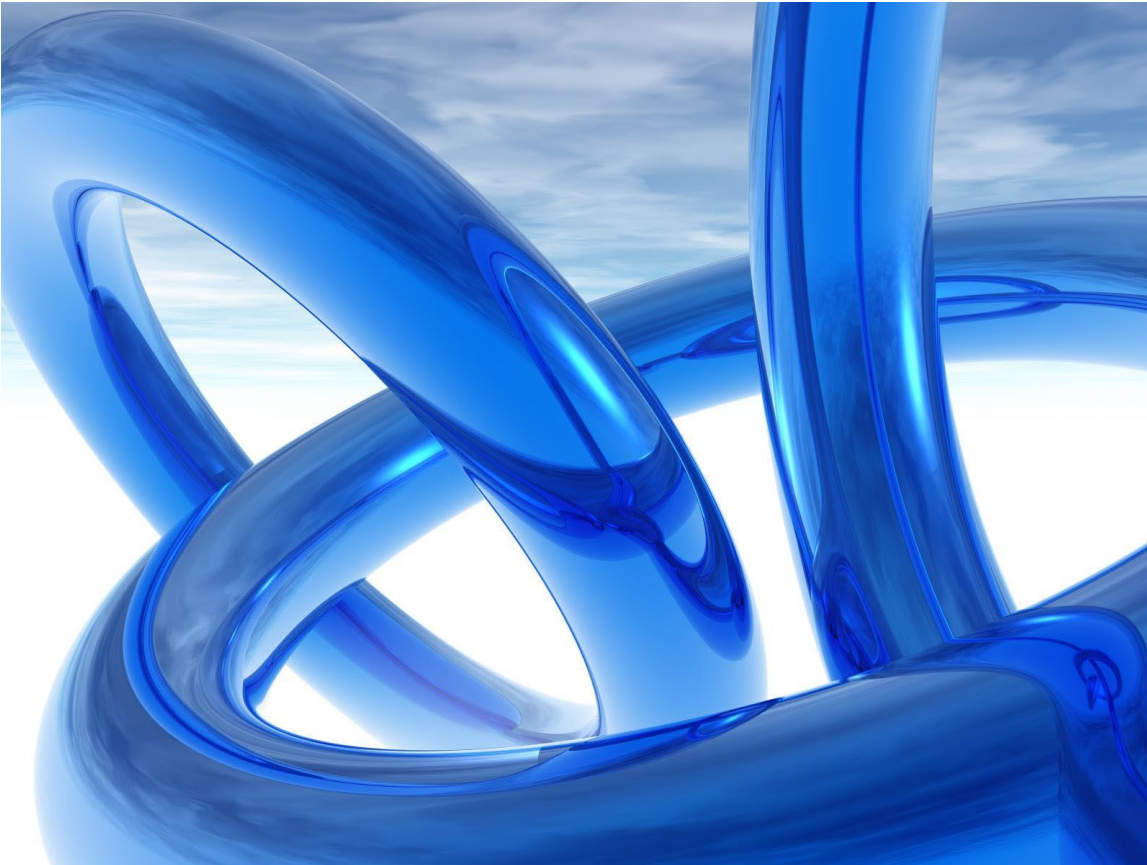
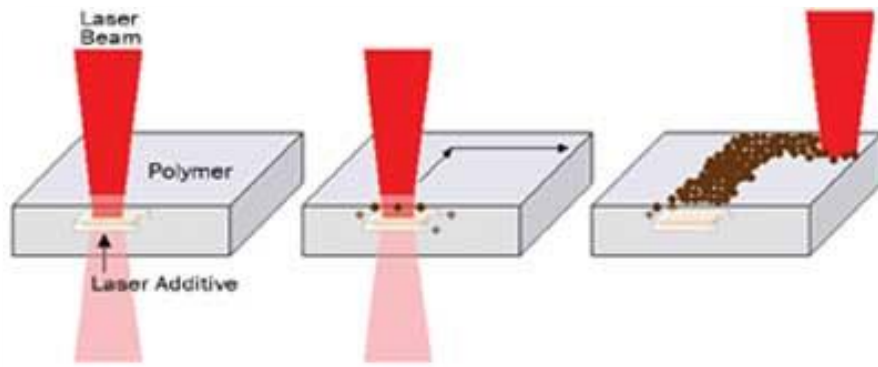

Laser Marking Additives



Laser Marking additives provide superior speed, definition, and high contrast levels to plastic parts.

Summary

Laser Marking of polymers relies on carbonization (char formation) or foaming processes caused by laser beam absorption. The char formation results in dark marks on a plastic part. Foaming creates gas-bubbles in the plastic, which scatters the light and produces light marks. Ampacet has a wide range of additives that can improve absorption properties of just about any plastic.



Laser Marking additives can provide high levels of contrast and shading. These formulations achieve line detail at impressive speeds on plastics that have historically been difficult to laser mark. Designed for thermal chemical surface reactions, these formulations are ideal for fiber, YAG, and vanadate lasers operating at a wavelength of 1060-1070 nm. Ampacet can utilize additives, fillers, pigments, and dyes to enhance the absorption of laser energy for localized color changes. Vastly different formulation chemistries and laser optics/setup parameters are used depending upon the plastic being marked, as well as the desired marking contrast and functionality.

Advantages of Laser Marking

- Lasers are flexible in terms of surface and design
- Economical
- Can be carried out at very high speed and without contact
- Inkless process
- Marking difficult to counterfeit
- Pre-treatment of surface not necessary
- Marking can be miniaturized

Benefits of Ampacet Laser Marking Products

- Can be used with all laser types
- Compatibility with most polymers
- Non-heavy metal formulations available
- Marks dark on most plastics/colors
- Can give a light mark on certain dark parts
- FDA compliant formulations are available



Product Applications

- Bar coding
- Expiration dates
- Serial numbers
- Identification tags
- Security straps
- Traceability
- Aesthetic designs



Laser Marking Systems

- **Nd:YAG** – Solid-state Nd:YAG lasers are the work-horse of the industry. These lasers give higher resolution due to their shorter wavelengths. The shorter the wavelength, the less heating is induced in the plastic substrate.
- **Fiber** – Newer technology and less common, these lasers are capable of high marking resolutions on plastic, with extremely small font sizes possible.
- **Vanadate** – Often used for ablation marking, in which a top coating is removed to expose a lower surface without damaging it.
- **CO₂** – A CO₂ laser etches the plastic surface, removing material by evaporation. The result is a contrasting mark but little or no true color change. Plastics that mark well with CO₂ lasers include PVC, ABS, and most polyesters.



Typical Values of Laser Marking Systems

Category	YAG	Vanadate	Ytterbium (fiber)
Pulse duration (ns)	10–150	5–30	10–200
Beam quality (M^2)	<1.2	<1.2	<2
Peak power (kW)	High, 100 kW range	Medium, 80 kW range	Low, 10 kW range
Average power (W)	5–30	5–40	10–50
Pulse repetition frequency range	5–80 kHz	20–120 kHz	20 kHz–1 MHz

Laser Marking Products

Model	Loading	LDR	Resin Compatibility	Laser Type	FDA	Notes
1000583-N	25	4-12%	All	Nd: YAG, UV	Up to 5%	Very good for TPU
1000614-N	25	1-2%	All	Nd:YAG, Fiber	Up to 5%	Lower Cost
1000582-N	25	1-2%	All	Nd:YAG, Fiber, Vanadate app. 1060nm	Y	High Resolution
1000592-N	25	2%	All	Nd:YAG, Fiber, Vanadate app. 1060nm	In process	
1000591-N	25	2%	All	Nd:YAG, Fiber, Vanadate app. 1060nm	N	
1000581-N	25	1-2%	PE, PP	Nd:YAG	Y	Non-heavy metal
1000615-N	25	1-2%	All	Nd:YAG, Fiber, Vanadate app. 1060nm	Up to 5%	Non-heavy metal



For more information on **Laser Marking**, its uses and complete Regulatory Status, contact your Ampacet Account Executive or visit www.ampacet.com.

The information and recommendations contained in this document are based upon data collected by Ampacet and believed to be correct. However, no warranty of fitness for use or any other guarantees or warranty of any kind, expressed or implied, is made to the information contained herein, and Ampacet assumes no responsibility for the results for the use of products and processes described herein. No liability whatsoever shall attach to Ampacet for any infringement of the rights owned or controlled by a third party in intellectual, industrial or other property by reason of the applications, processing or use of the aforementioned information or products by the buyer.

Ampacet Website: www.ampacet.com

Global Regional Headquarters:

Ampacet North America: 660 White Plains Road, Tarrytown, NY 10591-5130

Ampacet South America, S.A.: Dardo Rocha 2454 – 2o Piso, (B1640FTH) San Isidro, Buenos, Aires, Argentina

Ampacet Europe, S.A.: Zoning Industriel Riedgen, L-3451 Dudelange, Luxembourg

Ampacet Asia: Eastern Seaboard Industrial Estate (Rayong), 64/19 Moo 4, Highway 331, Pluakdaeng, Rayong 21140

